



# PRODUCT TECHNICAL DATA SHEET

## Bottle B-2

### BASIC DATA

Nominal Capacity:	2 L	Application:	industrial chemistry
Thread Standards:	Ø 38 mm		household chemistry
Material Options:	HDPE		agro sector

### AVAILABLE VARIANTS

Parameter	Value	Certificates	Visibility Strip:	available
Weight:	68 g	-	Touch Sign:	available
Colors:	white, colorless		IML Label:	not available
Seal Type:	foam-PE		Printing:	available
			Customer Logo:	not available
			Seal Type:	breaking ring
			Thread Type:	Ø38C/ SK 38/23

### DIMENSIONS

Parameter	Value	Notes	Parameter	Value	Notes
Weight:	68 g	±3 g	Length:	110 mm	+0,5/-2 mm
			Width:	88,5 mm	±2,5 mm
			Height:	297 mm	±3 mm

### AVAILABLE CLOSURES


Ø38C: 3-5 Nm, Bericap SK 38/23: 2,4-3,6 Nm

### PALLETIZATION AND STORAGE - EMPTY PACKAGES

Packaging System No.:	st97P679	Pallet:	1200x800 mm
Label Content:	manufacturer's name, production date product type, product quantity (pcs) batch number, quality mark	Dividers:	cardboard trays
Storage:	protect against sunlight and weather conditions min. 1m away from heat sources ambient temperature up to 40°C	Pallet Module:	7 layers, stretch film
Shelf Life:	12 months from delivery	Quantity per layer:	97 pcs
Filling Temperature:	max. 40°C	Quantity per pallet:	679 pcs
		Pallet Weight:	70-80 kg
		Pallet Height:	2,3 m
		Seasoning before Filling:	min. 10 h at temp. 16-25°C

### TRANSPORT - EMPTY PACKAGES

Transport:	protection against rain, deformation, contamination and shifting
Warning:	additional loading of transport modules is not permitted
Layer Arrangement:	

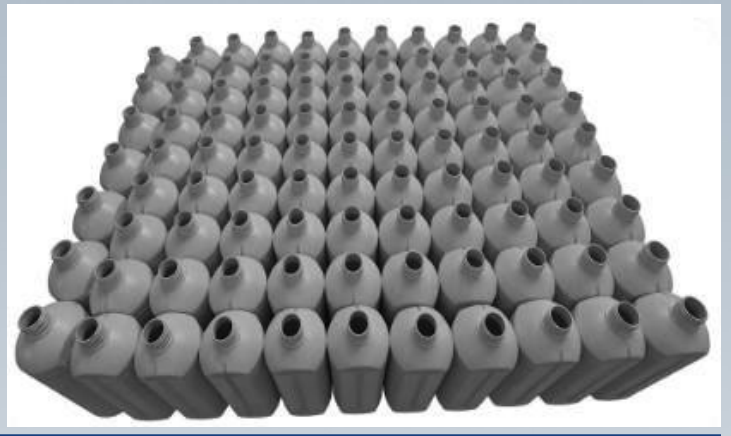

## STORAGE AND TRANSPORT - FILLED PACKAGING

**Completing:** The packaging manufacturer recommends stacking filled canisters in a maximum of three layers, using cardboard dividers on each layer. Completed filled canisters should be wrapped in stretch foil.

**Storage:** in covered rooms, on flat surfaces / shelves

temperature  $\leq 40^{\circ}\text{C}$ , stacking pallet units is not recommended

protect against sun and weather conditions, keep a distance of at least 1 m from heat sources

**Transport:** stacking pallet units is not recommended

protection against precipitation, deformation, dirt and movement

### ADDITIONAL INFORMATION

- The obligation to validate and confirm the compatibility of the product in the technological process, the logistics chain and in terms of compliance with the filled medium rests with the recipient.

**Edition: 2**

**Modification Date: 10.04.2026**