



## PRODUCT TECHNICAL DATA SHEET

# Canister K-2N

### BASIC DATA

Nominal Capacity:	2 L	Application:	industrial chemistry
Thread Standards:	SK 38/23, FI38C		household chemistry
Material Options:	HDPE		

### AVAILABLE VARIANTS

Parameter	Value	Certificates	Visibility Strip:	not available
Weight:	80 g	-	Touch Sign:	available
Colors:		colorless	IML Label:	not available
Seal Type:		foam-PE	Printing:	not available
			Customer Logo:	not available
			Seal Type:	breaking ring
			Thread Type:	Ø38C, Bericap

### DIMENSIONS

Parameter	Value	Notes	Parameter	Value	Notes
Weight:	80 g	±2 g	Length:	195 mm	±3,5 mm
Label Area:		90(H) x 155(W) mm	Width:	96 mm	±3 mm
			Height:	185 mm	±3,5 mm

### AVAILABLE CLOSURES


Suway 38C: 3-5 Nm, Bericap SK 38/23: 2,4-3,6 Nm

### PALLETIZATION AND STORAGE - EMPTY PACKAGES

Packaging System No.:	st48P576	Pallet:	1200x800 mm
Label Content:	manufacturer's name, production date product type, product quantity (pcs) batch number, quality mark	Dividers:	cardboard trays
Storage:	protect against sunlight and weather conditions min. 1m away from heat sources ambient temperature up to 40°C	Pallet Module:	12 layers, stretch film
Shelf Life:	12 months from delivery	Quantity per layer:	48 pcs
Filling Temperature:	max. 40°C	Quantity per pallet:	576 pcs
		Pallet Weight:	60 – 70 kg
		Pallet Height:	2,3 m
		Seasoning before Filling:	min. 10 h at temp. 16-25°C

### TRANSPORT - EMPTY PACKAGES

Transport:	protection against rain, deformation, contamination and shifting
Warning:	additional loading of transport modules is not permitted
Layer Arrangement:	

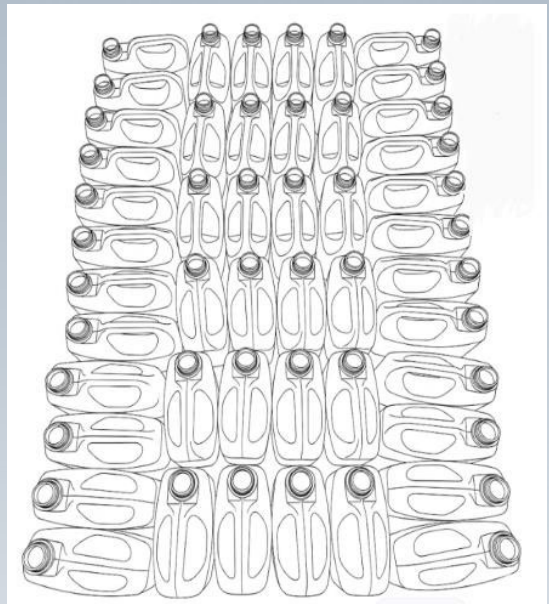

## STORAGE AND TRANSPORT - FILLED PACKAGING

Completing:	The packaging manufacturer recommends stacking filled canisters in a maximum of three layers, using cardboard dividers on each layer. Completed filled canisters should be wrapped in stretch foil.
Storage:	in covered rooms, on flat surfaces / shelves temperature $\leq 40^{\circ}\text{C}$ , stacking pallet units is not recommended protect against sun and weather conditions, keep a distance of at least 1 m from heat sources
Transport::	stacking pallet units is not recommended protection against precipitation, deformation, dirt and movement

### ADDITIONAL INFORMATION

- The obligation to validate and confirm the compatibility of the product in the technological process, the logistics chain and in terms of compliance with the filled medium rests with the recipient.

**Edition: 2**

**Modification Date: 10.04.2026**