

## PRODUCT TECHNICAL DATA SHEET

# Funnel L-52MK

### BASIC DATA

Funnel Diameter:	Fi 52	Application:	industrial chemistry
Material Options:	HDPE		household chemistry

### DIMENSIONS


Parameter	Value	Notes	Parameter	Value	Notes
Weight:	12 g	±1,5 g	Length:	180 mm	±2 mm
Colors:	colorless, other to be agreed with our employee		Inner Funnel Diameter:	51,7 mm	±0,4 mm

### PALLETIZATION AND STORAGE - EMPTY PACKAGES

Packaging System No.:	sK150P3000	Pallet:	1200x800 mm
Label Content:	manufacturer's name, production date product type, product quantity (pcs) batch number, quality mark	Cardboard boxes:	580x380x290
Storage:	protect against sunlight and weather conditions min. 1m away from heat sources ambient temperature up to 40°C	Pallet Module:	20 layers, stretch film
Shelf Life:	12 months from delivery	Quantity per layer:	150 pcs
		Quantity per pallet:	3000 pcs
		Pallet Weight:	55 kg
		Pallet Height:	1,65 m

### TRANSPORT - EMPTY PACKAGES

Transport:	protection against rain, deformation, contamination and shifting
Warning:	additional loading of transport modules is not permitted
Layer Arrangement:	

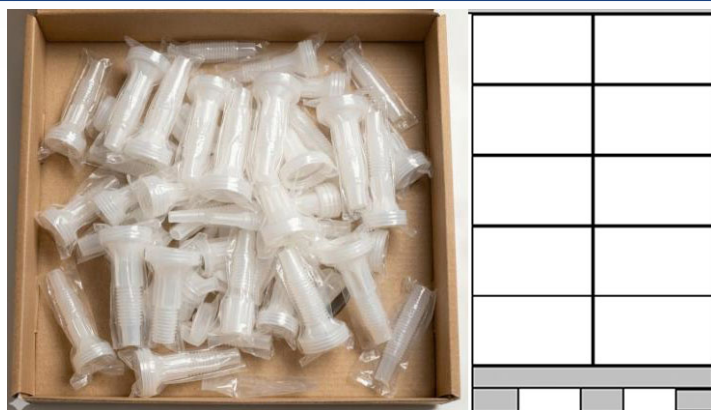

### STORAGE AND TRANSPORT - FILLED PACKAGING

Completing:	The packaging manufacturer recommends stacking filled canisters in a maximum of three layers, using cardboard dividers on each layer. Completed filled canisters should be wrapped in stretch foil.
Storage:	in covered rooms, on flat surfaces / shelves temperature ≤ 40°C, stacking pallet units is not recommended protect against sun and weather conditions, keep a distance of at least 1 m from heat sources
Transport::	stacking pallet units is not recommended

protection against precipitation, deformation, dirt and movement

---

#### ADDITIONAL INFORMATION

- The obligation to validate and confirm the compatibility of the product in the technological process, the logistics chain and in terms of compliance with the filled medium rests with the recipient.

**Edition: 1**

**Modification Date: 10.04.2026**