

## PRODUCT TECHNICAL DATA SHEET

# Canister K-20N2

### BASIC DATA

Nominal Capacity:	20 L	Application:	industrial chemistry
Thread Standards:	Ø 52		household chemistry
Material Options:	HDPE		agro sector

### AVAILABLE VARIANTS

Parameter	Value	Certificates	Visibility Strip:	available
Weight:	740 g	UN (II i III, to 1,3 g/cm³)	Touch Sign:	available
	800/830 g	UN (II i III, to 1,3 g/cm³)	IML Label:	not available
	900/940 g	UN (II i III, to 1,3 g/cm³)	Printing:	not available
	960 g	UN (II i III, to 1,3 g/cm³)	Customer Logo:	available
Colors:	white, colorless		Thread Type:	52M, Suwary
Seal Type:	foam-PE			

### DIMENSIONS

Parameter	Value	Notes	Parameter	Value	Notes
Weight:	720/740 g	+30 g	Length:	288 mm	±4 mm
	800 g	+30 g	Width:	256 mm	±4 mm
	830 g	-20 g	Height:	376 mm	±6 mm
	900 g	+30 g			
	940/960 g	+30 g			

### AVAILABLE CLOSURES


Suwary 52M: 9-11 Nm

### PALLETIZATION AND STORAGE - EMPTY PACKAGES

Packaging System No.:	sT12P72 / sW8P160 (po potwierdzeniu)	Pallet:	1200x800 mm
Label Content:	manufacturer's name, production date	Dividers:	cardboard trays
	product type, product quantity (pcs)	Pallet Module:	6 / 10 layers, stretch film
	batch number, quality mark	Quantity per layer:	12 / 16 pcs
Storage:	protect against sunlight and weather conditions	Quantity per pallet:	72 / 160 pcs
	min. 1m away from heat sources	Pallet Weight:	maks. 90 / 200 kg
	ambient temperature up to 40°C	Pallet Height:	2,5 / 2,8 m
Shelf Life:	12 months from delivery	Seasoning before Filling:	min. 10 h at temp. 16-25°C
Filling Temperature:	max. 40°C		

### TRANSPORT - EMPTY PACKAGES

Transport:	protection against rain, deformation, contamination and shifting
Warning:	additional loading of transport modules is not permitted
Layer Arrangement:	

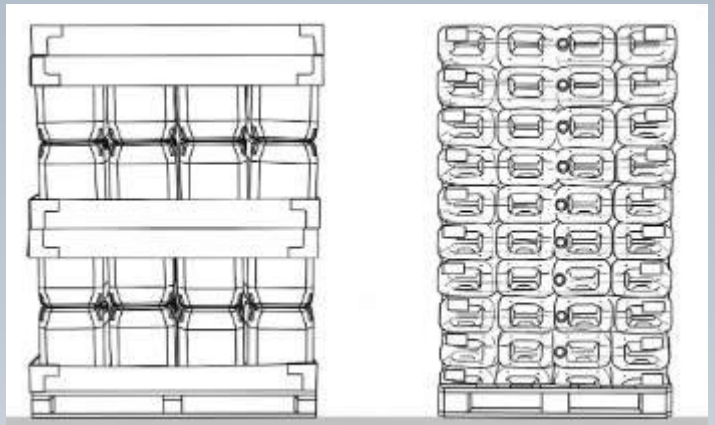

## STORAGE AND TRANSPORT - FILLED PACKAGING

**Completing:** The packaging manufacturer recommends stacking filled canisters in a maximum of three layers, using cardboard dividers on each layer. Completed filled canisters should be wrapped in stretch foil.

**Storage:** in covered rooms, on flat surfaces / shelves

temperature  $\leq 40^{\circ}\text{C}$ , stacking pallet units is not recommended

protect against sun and weather conditions, keep a distance of at least 1 m from heat sources

**Transport:** stacking pallet units is not recommended

protection against precipitation, deformation, dirt and movement

### ADDITIONAL INFORMATION

- The obligation to validate and confirm the compatibility of the product in the technological process, the logistics chain and in terms of compliance with the filled medium rests with the recipient.

**Edition: 2**

**Modification Date: 10.04.2026**